


## MQF240E SERIES

240 Watts

## KEY FEATURES

- Enclosed Medical Switching Power Supply
- 4000VAC Input to Output 2MOPP Insulation
- High Efficiency up to 93%
- With P.F.C. Function >0.9
- <0.5W No Load Input Power
- EMI for Both Class I (with PE) and Class II (without PE) Configuration
- Suitable for BF Application with Appropriate System Consideration
- UL / IEC / EN 60601 3.2 Edition & UL / IEC / EN 62368 Safety Approvals
- 3-Year Product Warranty

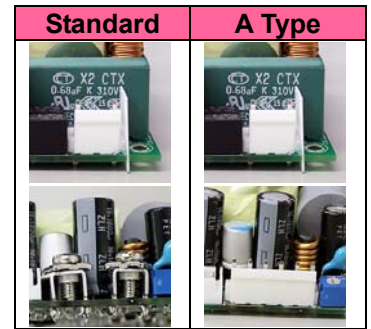

Please refer to the types of terminal block; the pictures shown are for illustration purpose only, actual product may vary.



## ELECTRICAL SPECIFICATIONS

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.		MQF240E-12S	MQF240E-15S	MQF240E-24S	MQF240E-48S
Max Output Wattage (with 10CFM FAN) (W)		240 W			
Input	Voltage (Note 4)	90-264 VAC			
	Frequency (Hz)	47-63 Hz			
	Current (Full load)	< 3.0 A max. (115 VAC) / < 1.5 A max. (230 VAC)			
	Inrush Current (<2ms)	< 45 A max. (115 VAC) / < 90 A max. (230 VAC)			
	Leakage Current	< 0.1mA / 264 VAC (Touch Current)			
	Power Factor	PF>0.9 at Full Load			
Output	Voltage (V.DC.)	12V	15 V	24V	48V
	Voltage Adj Range (V.DC.)	±4% Output Voltage			
	Voltage Accuracy	±2%			
	Current (A) (max.)	20	16	10	5
	Line Regulation	±1%			
	Load Regulation (0-100%)	±1%			
	Minimum Load	0%			
	Maximum Capacitive Load	8000μF	2000μF	3000μF	470μF
	Ripple & Noise (max.) (Note 1)	1% Vout			
	Efficiency (at 230VAC) (Note 6)	92%	92%	92.5%	93%
	Hold-up Time (at 115 VAC) (Note 2)	10 ms min.			
Protection	Over Power Protection	Auto recovery, Hiccup mode			
	Over Voltage Protection	Auto recovery			
	Over Temperature Protection	Auto recovery			
	Short Circuit Protection	Protection level 1 (nominal) : Continuous, Auto recovery Protection level 2 (instantaneous high current) : Latch			
Isolation	Input-Output (Note 5)	4000VAC or 5656VDC			
	Input-PE (Note 5)	2000VAC or 2828VDC			
	Output-PE (Note 5)	1500VAC or 2121VDC			
Environment	Operating Temperature	-30°C...+70°C (with derating)			
	Storage Temperature	-30°C...+85°C			
	Temperature Coefficient	±0.05%/°C			
	Altitude During Operation	5000m			
	Humidity	20~90% RH			
	Atmospheric Pressure	56 kPa to 106 kPa			
	MTBF	>250,000 h @ 25°C (MIL-HDBK-217F, Notice 1)			
	Vibration	IEC60068-2-6 (10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)			
	Shock	IEC60068-2-27			

## MQF240E SERIES

240 Watts

## ELECTRICAL SPECIFICATIONS

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.


Model No.		MQF240E-12S	MQF240E-15S	MQF240E-24S	MQF240E-48S
Physical	Dimensions (L x W x H)	4.1 x 2.44 x 1.99 Inches ( 104.0 x 62.0 x 50.5 mm ) Tolerance $\pm 0.5$ mm			
	Weight	328 g			
Safety	Approval	12S/24S/48S: UL / IEC / EN 60601 3.2 <sup>rd</sup> Edition (2 x MOPP), UL / IEC / EN 62368-1			
	Approval / Meet	15S: UL / IEC / EN 60601 3.2 <sup>rd</sup> Edition (2 x MOPP), UL / IEC / EN 62368-1 (meet)			
EMC	Conducted EMI (Note 7)	EN55011 Conducted Class B			
	Radiated EMI (Note 7)	EN55011 Class I class B / Class II class A			
	EMS	EN60601-1-2 4th edition			

## NOTE


1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. Hold-up Time measured at 90% Vout.
3. Main Vout must be >50% Load, 12V (Aux) / 0.5A.
4. Please check the derating curve for more details.
5. Strongly recommend to conduct this test with DC Voltage. If customer wishes to test with AC Voltage, please disconnect all Y-Capacitors from Arch power supply.
6. After 30 minutes of burn-in
7. Please secure the power supply unit to your metal case by using the four screw holes in the corners for either Class I or Class II equipment
8. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing.  
(ATTENTION : 2 poles avec fusible sur le neutre. Deconnecter le secteur avant intervention.)

## DERATING


Derating Output Load versus Operating Temperature

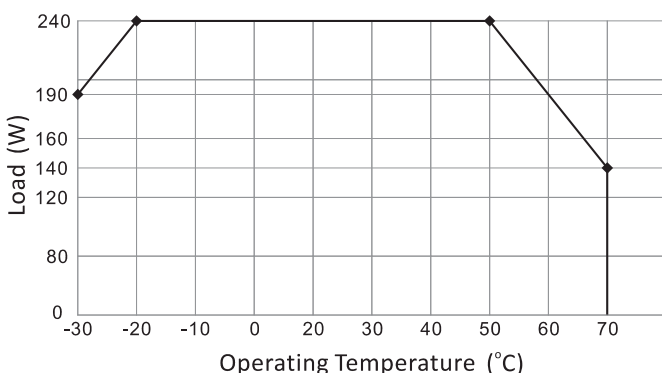

Derating Load versus Input Voltage

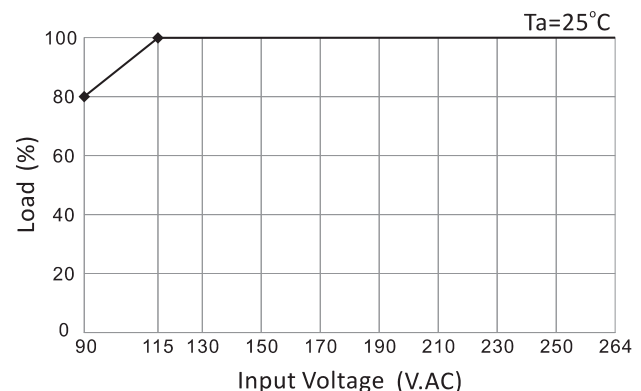

## BLOCK DIAGRAM

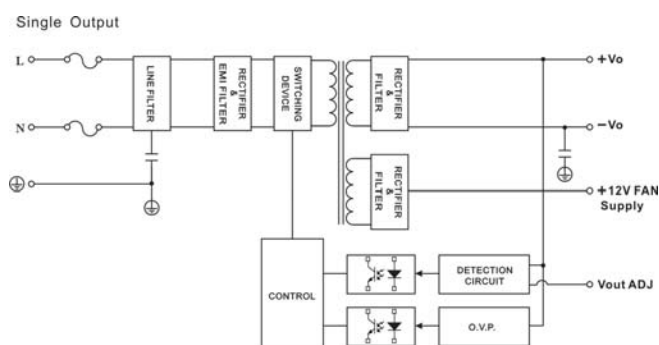


## MQF240E SERIES

240 Watts

## MECHANICAL DIMENSIONS ( Top View )

## Standard

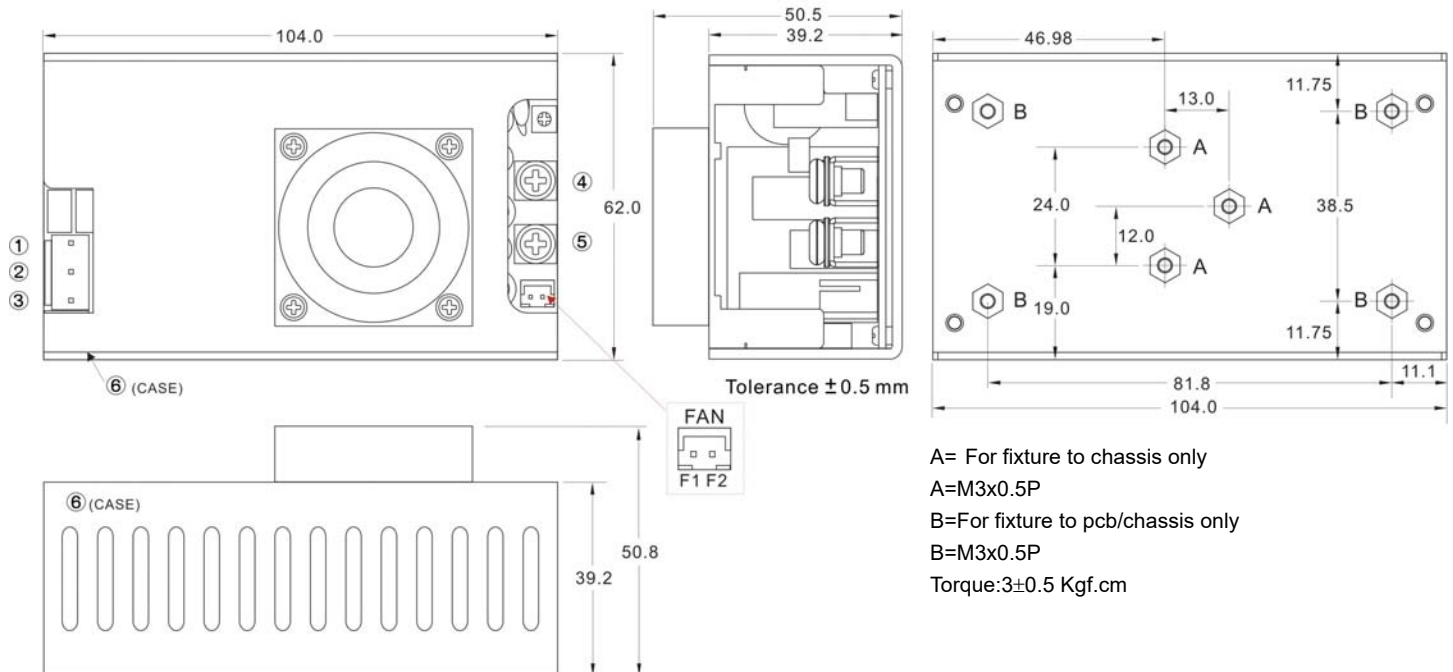


Brands		Alex		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
1	AC IN (N)	9396-3	96T series	VHR-3N	SVH-41T-P1.1
2	NO PIN				
3	AC IN (L)				
4	+DC OUT	Terminal : M3.5 Pan HD screw in 2 positions Torque to 8 lbs-in(90 cNm) max.			
5	-DC OUT				
6	PE	—	—	—	—

## ASSEMBLY INSTRUCTIONS

\*U Case T=1.5mm

Customer is advised to screw into the threads no more than 1.5mm

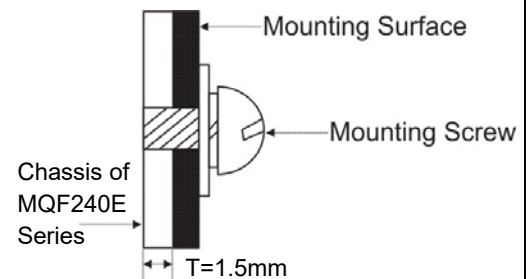

Connector Pin (FAN)					
Brands		Cherng Weei		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
F1	+AUX OUT	CX-H250-02	CX-T2501	XHP-2	SXH-002T-P0.6
F2	-AUX OUT				

## Standard




Please refer to the types of terminal block; the pictures shown are for illustration purpose only, actual product may vary.

## MQF240E SERIES

240 Watts

## MECHANICAL DIMENSIONS ( Top View )

## A Type

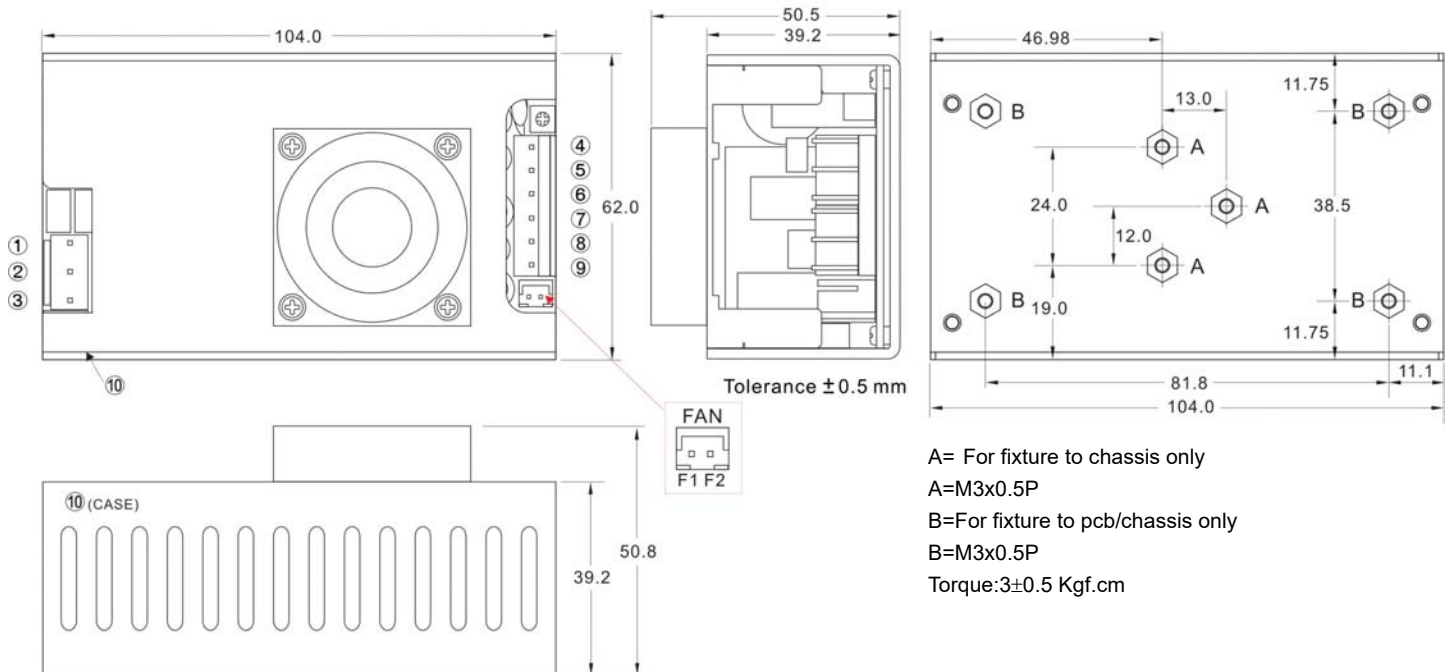


Brands		Alex		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
1	AC IN (N)	9396-3	96T series	VHR-3N	SVH-41T-P1.1
2	NO PIN				
3	AC IN (L)				
4~6	+DC OUT	9396-6	96T series	VHR-6N	SVH-41T-P1.1
7~9	-DC OUT				
10	PE	—	—	—	—


## ASSEMBLY INSTRUCTIONS

\*U Case T=1.5mm

Customer is advised to screw into the threads no more than 1.5mm

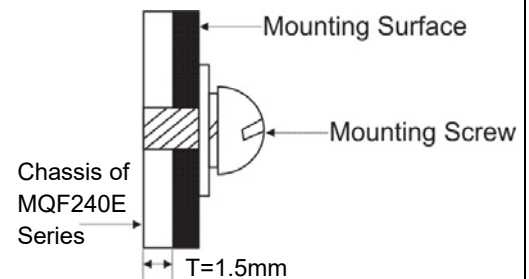

Connector Pin (FAN)					
Brands		Cherng Weei		JST	
PIN#	Single	Mating Housing	Terminal	Mating Housing	Terminal
F1	+AUX OUT	CX-H250-02	CX-T2501	XHP-2	SXH-002T-P0.6
F2	-AUX OUT				

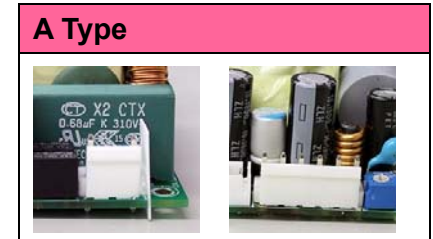

Please refer to the types of terminal block; the pictures shown are for illustration purpose only, actual product may vary.